

ERATECH



ELECTRIC WIRE ROPE HOIST

- 10 Drive trolley whole type "three in one", without opening gear driven struction compact

- 1 International advanced tide low headroom struction compact & nice


- 2 Reducer light struction, high strength hard gear surface, inclined gear driving low yawp, long life

- 9 Wire rope with strength factor 2160 N/mm²

- 8 Hook units On the pulley, rope exit with wearable rubber cover



Column rotor, inside fit plane braking, double winding pole - changing control motor, incorporate with reducer, suit higher classification

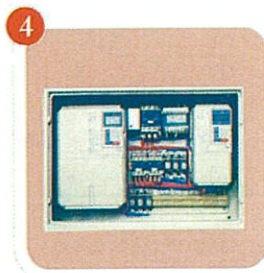


Electric control box have the staggered phase, short phase & over current protection according customers requirement, can adopt the change quence adjust system



Telecontrol button can fit the wireless telecontrol according to customer's opinion operate easy and freely





Control button the normal control button have high protection class & safety

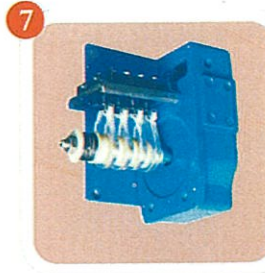


Cam limit switch cam limit mode operate safety

Quality with German Technology
Reliability with ABM gearboxes and motors
Economically produced in China

■ ISL 21 Low Headroom Electric Rope Hoist

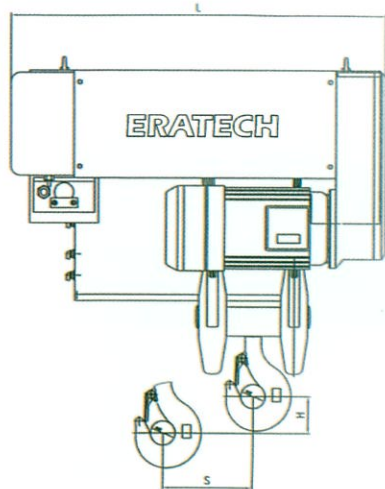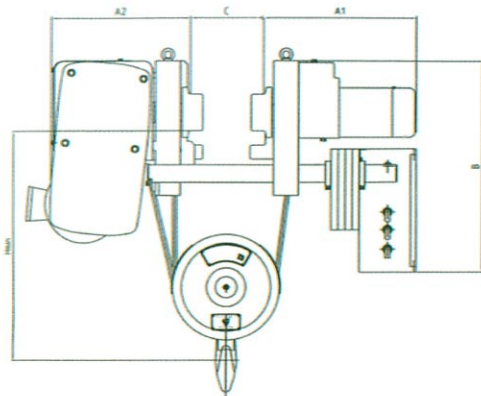

Monrail Hoist

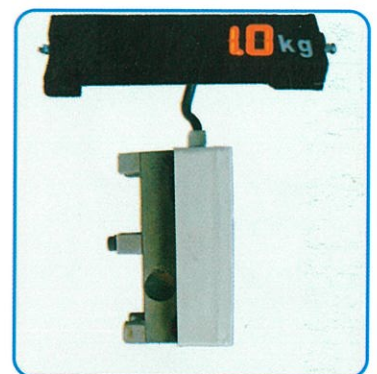

Load Cell

■ Technical Parameters

Type	Capacity (t)	Lifting speed (m/min)	Traveling speed (m/min)	Classifi- cation	Rope reeving	Lifting motor (kw)	C	A1	A2	B	Hmin	S	L				N.W (kg)
													Lifting standard (m)				
													6	9	12	18	
ISL21-2	1.6	8.0/1.3	15/5	M5	2/1	2.5/0.37	100-400	420	320	590	570	0.0398H	690	810	925	1143	
	3.2	4.0/0.7	15/5	M5	4/1	2.5/0.37	100-400	420	320	436	500	0.0199H	925	1142	1381		
ISL21-3	2.5	8.6/1.4	15/5	M5	2/1	4.9/0.8	100-450	500	400	600	720	0.0424H	720	845	972	1226	
	5	4.3/0.7	15/5	M5	4/1	4.9/0.8	100-450	500	400	600	650	0.0212H	972	1153	1392		
ISL21-4	6.3	10.5/1.8	15/5	M4	2/1	12.5/2.0	100-500	570	500	700	950	0.0385H	761	881	993	1224	
	12.5	5.3/0.9	15/5	M4	4/1	12.5/2.0	100-400	570	500	700	800	0.0192H	993	1224	1455		



In accordance with our company's policy of continued improvement, we reserve the right to amend specifications and details at anytime.

Distributor

--